


1000 Series Fabric Wrap Gaskets

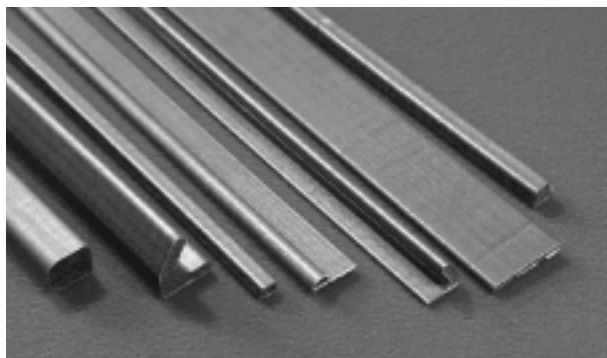

The 1000 Series gaskets consist of a highly conductive fabric wrapped over a foam core, the standard range of fully wrapped gaskets has a silver plated conductive fabric giving a shielding effectiveness of over 90 dB in frequencies of 20MHz to 10GHz. The foam core is a soft easily compressible urethane offering a low closure force and many profiles are available with fire retardant UL94 V-O core. Flat and symmetrical profiles are available in continuous lengths and other profiles in 2.1 metre lengths, when cut the gasket is non-fray or self-terminating. Gaskets can also be fabricated into frames.

The 1000 series are most suited to commercial applications, offering a temperature range of -40°C to +70°C, ideal for filling large gaps such as cabinet panels and door seals and grounding applications.

Compression set is <5% at 7°C with 50% compression for 22 hours.

D Profiles- 1020 Range



Ht	Width	Part No
1.5	3.8	1020-0015-0038 SAB
3.6	6.4	1020-0036-0064 SAB
4.7	7.6	1020-0047-0076 SAB
6.4	9.5	1020-0064-0095 SAB

Clip on D Profile- 1030 Range



Ht	Width	Part No
3.2	7.1	1030-0032-0071 SAB
4.6	12.2	1030-0046-0122 SAB

C Fold (L shape)- 1040 Range




Ht	Width	Part No
6.4	5.9	1040-0064-0059 SAB
9.8	10.7	1040-0098-0107 SAB
11.8	10.7	1040-0118-0107 SAB
17.9	14.7	1040-0179-0147 SAB

Knife-edge Profile- 1050 Range



Ht	Width	Part No
2.7	8.0	1050-0027-0080 SAB
2.7	11.3	1050-0027-0113 SAB

Rectangular Profiles - 1010 Range

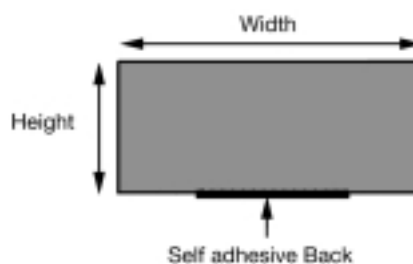

Ht	Width	Part No
0.5	4.0	1010-0005-0040 SAB
0.5	5.0	1010-0005-0050 SAB
0.5	10.0	1010-0005-0100 SAB
1.0	3.0	1010-0010-0030 SAB
1.0	4.0	1010-0010-0040 SAB
1.0	5.0	1010-0010-0050 SAB
1.0	7.0	1010-0010-0070 SAB
1.0	10.0	1010-0010-0100 SAB
1.0	25.4	1010-0010-0254 SAB
2.0	4.0	1010-0020-0040 SAB
2.0	7.0	1010-0020-0070 SAB
2.0	10.0	1010-0020-0100 SAB
2.0	12.7	1010-0020-0127 SAB
2.0	21.0	1010-0020-0210 SAB
2.0	28.6	1010-0020-0286 SAB
2.0	41.3	1010-0020-0413 SAB
2.0	60.0	1010-0020-0600 SAB
3.0	3.0	1010-0030-0030 SAB
3.0	4.0	1010-0030-0040 SAB
3.2	6.4	1010-0032-0064 SAB
3.2	9.5	1010-0032-0095 SAB
3.2	12.7	1010-0032-0127 SAB
3.3	4.8	1010-0033-0048 SAB
3.7	21.0	1010-0037-0210 SAB
4.0	15.0	1010-0040-0150 SAB
4.6	41.3	1010-0046-0413 SAB
5.0	8.0	1010-0050-0080 SAB
5.08	5.08	1010-0051-0051 SAB
6.0	6.0	1010-0060-0060 SAB
6.4	9.5	1010-0064-0095 SAB
6.4	12.7	1010-0064-0127 SAB
7.5	15.0	1010-0075-0150 SAB
9.5	9.5	1010-0095-0095 SAB
9.5	12.7	1010-0095-0127 SAB
9.5	25.4	1010-0095-0254 SAB
11.5	10.5	1010-0115-0105 SAB
15.9	25.4	1010-0159-0254 SAB
17.0	17.0	1010-0170-0170 SAB